

DRYLOK® LATEX BONDING AGENT



DRYLOK® Latex Bonding Agent bonds concrete and plaster to difficult surfaces such as dense, slick, or porous concrete, stone, ceramic tile, stucco and plaster walls. It is ideal for repairing and repointing masonry, parging walls, resurfacing concrete driveways, patios, slabs, and steps.

When used as an additive or instead of water in concrete and plaster mixes, DRYLOK® Latex Bonding Agent improves the adhesion and increases the resiliency and elasticity of the patch which greatly extends the life of the repaired area.

This product when added to **DRYLOK® Powdered Concrete & Masonry Waterproofer** will form a polymer modified waterproofing agent with enhanced properties, such as: water penetration resistance, flexural and tensile strength increase, improved bond strength, reduced shrinkage, and enhanced freeze-thaw resistance.

FEATURES:

- Formula:** latex
- Application tools:** brush, spray or add mix
- Location:** interior, exterior
- Optional:** may be top-coated after 30 minutes with coating of plaster or concrete
- Where to use:** add to plaster, cement, stucco, waterproofer and concrete mix to improve performance, stone, masonry to masonry, bond concrete and plaster to difficult surfaces, dense, slick or porous concrete, stone, drywall, and hardboard

BENEFITS:


- Bonds new concrete and plaster to difficult surfaces
- Makes cement, stucco and plaster adhere better
- Primes plaster cracks
- Improves performance of powdered waterproofer



Soap and Water
Clean up



500 Sq Ft
Coverage per Gal

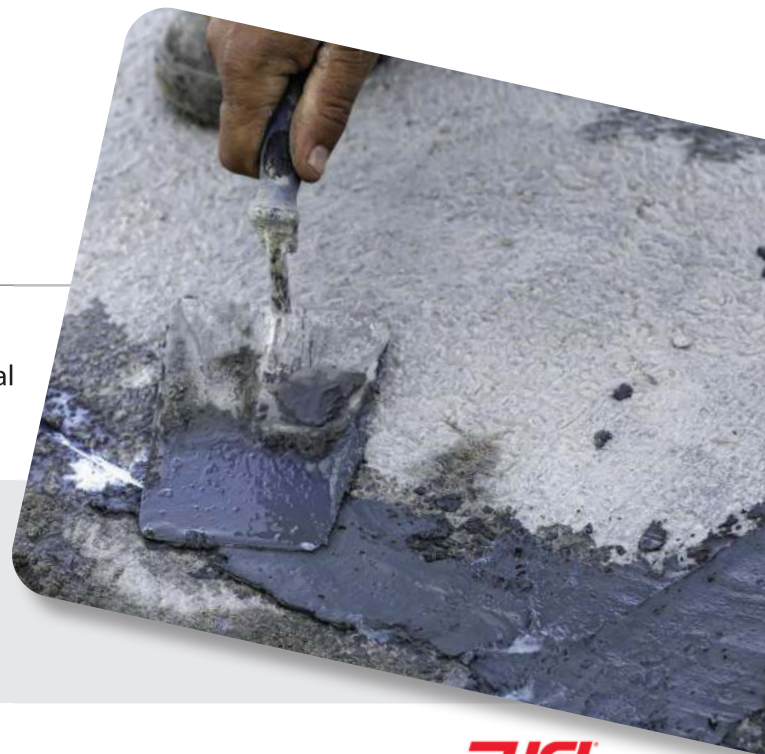

1 GAL. 2/Case.....22213